

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
 - TEXT CUT OFF AT TOP, BOTTOM OR SIDES
 - FADED TEXT
 - ILLEGIBLE TEXT
 - SKEWED/SLANTED IMAGES
 - COLORED PHOTOS
 - BLACK OR VERY BLACK AND WHITE DARK PHOTOS
-
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.

THIS PAGE BLANK (USPTO)



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04Q 7/38	A2	(11) International Publication Number: WO 97/31498 (43) International Publication Date: 28 August 1997 (28.08.97)
---	-----------	---

(21) International Application Number: PCT/FI97/00113

(22) International Filing Date: 20 February 1997 (20.02.97)

(30) Priority Data:
960760 20 February 1996 (20.02.96) FI(71) Applicant (for all designated States except US): TELECOM
FINLAND OY [FI/FI]; P.O. Box 106, FIN-00051 Tele (FI).


(72) Inventor; and

(75) Inventor/Applicant (for US only): RANTANEN, Kari [FI/FI];
Framnäsintie 6 A 11, FIN-02430 Masala (FI).(74) Agent: LAHTI, Heikki; Telecom Finland Oy, P.O. Box 106,
FIN-00051 Tele (FI).(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR,
BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE,
HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS,
LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL,
PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA,
UG, US, UZ, VN, YU, ARIPO patent (KE, LS, MW, SD,
SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU,
TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI,
FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent
(BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD,
TG).**Published***In English translation (filed in Finnish).**Without international search report and to be republished
upon receipt of that report.*

(54) Title: SYSTEM AND METHOD FOR TRANSMITTING DATA

(57) Abstract

The invention relates to a system and a method to transmit data to a company's data system (23) by a mobile phone (20) connected to a mobile communications network, and receive an acknowledgement to the same mobile phone from the company's data system. Characteristic to the invention is that a preset target number dialed by a mobile phone is directed to an intelligent network centre (21), that the target number is decoded into data, which is transmitted to a company's data system during the connection. The intelligent network centre uses the caller's number identifying to check whether the caller is entitled to use the service, and to check to which information system of which company the data has been sent. The intelligent network centre transmits preferably by using transmits a telecommunications network signalling the target number, caller's number and address of the company's to a voice server (22), which is a computer capable also to identify telephone numbers and formulate voice messages. The voice server converts the target number into data and transmits the data and the caller's number to the company's data system using a data network, preferably a data network based on TCP/IP protocol. The company's data system stores the data in the data system and formulates a return message, which includes an acknowledgement of the received data and further a possible additional information, and transmits it to the voice server using the data network. The voice server transmits using the mobile communications network the return message either as a GSM short message (text message) or as a voice message to the mobile station, which transmitted the data code, or as a pager message to the desired pager device.

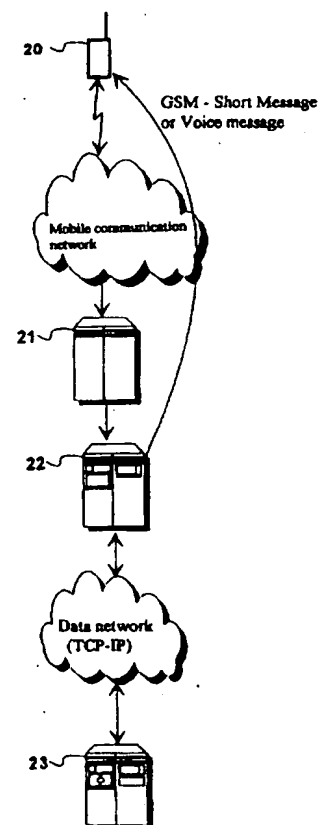

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

SYSTEM AND METHOD FOR TRANSMITTING DATA

The present invention relates to a system and method for transmitting data to a company's data system by a mobile station linked to a mobile communications network, and for receiving from the company's data system acknowledgment to the same mobile station.

A mobile station can be used for data transmission by connecting it, for example, to a portable computer and by using therein a modem which complies with the mobile station in question. Then a first connection is established to the modem pool of a receiving data system, and there after data is transmitted once the connection has been made. Another possibility, especially in a GSM system, is to send data as a short message or SMS-message. On the other hand, there exists services based on A-subscriber identifying and number conversion in the intelligent network centre, which make it possible to make a call from mobile stations to extension numbers of a company's local area network by using just the extension number as the dialing number.

A drawback of the above mentioned transmission modes of mobile data is, that if a modem transmission is used, it takes tens of seconds to establish a connection, data transmission can begin only there after. The modems required are also fairly expensive. However, a problem with short message is that transmission thereof by the mobile station is quite complicated and at the receiving side there are no direct interfaces to the data systems.

The main objective of the present invention is to eliminate the drawbacks and disadvantages mentioned above, and to enable a new type of system and method for transmitting data and for receiving acknowledgment. This objective has been achieved by the type of the system and method mentioned in the beginning, the characteristic features thereof are disclosed in the accompanying claims.

According to the present invention, a mobile station transmits data as coded directly to a target number of a company's data system. The caller's number (A-identity, in the case of a mobile station subscriber IMSI or the international mobile subscriber identity) and the target number dialed by the caller (B number) together decide what function follows from the contact. A suffix of the numeric sequence is converted to data using an intelligent, programmable server connected to the telephone network. Caller identification is used to restrict mobile stations accessing within the service. The restriction is effected by the intelligent network centre. The data and A-number associated therein are transmitted from the server to the customer's data system by using a data network connection. A voice message or, in the case of GSM-mobile phone, a short message service (SMS) is used to acknowledge message

arrival and a real time transmission of a return message directly from the customer's data system back to the same mobile phone, which sent the data code.

As an advantages of the invention can be mentioned, that the entire code transmission - return message is in real time and the entire process chain using a GSM mobile phone takes only around some ten seconds. The mobile phone requires no ancillary equipment to make the data transmission possible.

The invention is described in the following in more detail detailed manner with reference to the accompanying drawings, wherein:

- Figure 1 shows the structure of the mobile communications network
- Figure 2 shows the structure of the system according to the invention
- Figure 3 shows a flowchart of function of the system.

Figure 1 shows the structure of the mobile communications network. The mobile communications network comprises at least one mobile services switching centre 1, at least one base station controller 2 and at least one base station 3. The mobile services switching centre can be the mobile station's home location centre, wherein the mobile station is registered, a visitor location centre, within the area of which the mobile phone is located at any given time, but where it is not permanently registered, or a gateway mobile services switching centre, to which a call is directed from outside the mobile communications network when it is not directed straight to the mobile services switching centre of the mobile communications network, in the area of which the mobile phone is located. A base station controller is an equipment belonging to the mobile communications network, which controls the function of one or more base stations with respect to forming a call, signaling, use of radio channels and various maintenance functions. The base station is a transmitter-receiver station of the mobile communications network, to which the mobile phones are in contact.

In the figure 2 is shown the structure of system according to the invention. The mobile phone 20 calls via the mobile communications network to an intelligent network centre 21 by using as a target number (B-number) a number, which includes a number code of the data to be transmitted. When calling to a public telecommunications network by a mobile phone, the B numbers always begin with 0, 1 or 9, because calling to all numbers in a local telecommunications network takes place using a directory area code beginning with 9 (will change to a telecommunications area code beginning with 0 in October 1996), and service, emergency, international and mobile communications network num-

bers also begin with 0, 1 or 9. Hence the numbers beginning 2 - 8 within the numbering space are free for other use, such as for the data code usage in accordance with the invention. In the beginning of the B number can be used f.ex. a double digit code to indicate, that there is a data code transmission in question, if a numbering space beginning with 2 - 8 is used also f.ex. as dialing numbers for numbers of a company's local area network. The intelligent network centre checks basing to the caller's number (A-identity, in the case of a mobile subscriber the IMSI or international mobile subscriber identity) whether the caller is entitled to use the service. Furthermore, based on the A-number, the intelligent centre determines to which data centre in which company the mobile phone is sending the data code. After this the intelligent centre transmits preferably by using telecommunications network signaling the B-number (data code), A number both the address of the company's data system to a voice server 22. The voice server is a computer connected to the telecommunications and data network which is also able to identify telephone numbers and formulate voice messages. The voice server converts B number into data and transmits the data both the A-number into the company's data system.23 by using a data network, preferably a data network based on TCP/IP protocol. The company's data system stores the data in the data system and formulates a return message, which includes an acknowledgment of the received data and further a possible additional information, and transmits it to the voice server using the data network. The voice server transmits using the mobile communications network the return message either as a GSM short message (text message) or as a voice message to the mobile phone, which transmitted the data code, or as a pager message to the required pager device. There exists a direct connection from the voice server to the GSM short message centre and pager system. If the return message is sent as the voice message, the voice server opens a speech channel to the calling mobile phone and transmits a voice message. Otherwise there is no need to open any voice connection, since the return message is sent as a separate GSM short message or pager message, and data transmission and transmission in the telecommunications network takes place purely as a signal message without opening the speech channel.

In the figure 3 is shown as a flowchart in a form of an example function of the system in accordance with the invention. In the point 30 the a mobile station, the A-number of which is 123456 calls to a target number 87 654321, wherein the 87 is the identity code, which tells that there is a question of data code transmission, and the 654321 is the transmitted data code. The call is directed to an intelligent network centre, which checks at point 31 on the basis of the A-number to see whether the mobile station is entitled to use the service, and to which information system of which company the mobile station is sending the data code. At point 32 the intelligent network centre transmits using the telecommunications network signaling the data code 654321, the A-identity 123456 and the address of the company's data system to the voice server. At point 33 the voice server converts numerical code

654321 into data format and transmits it and the A-identity to the company's data system. At point 34 the company's data system makes updating to the database f.ex. "mechanician NN completed job 654 using therein 3 spare parts, time used 21 minutes". At point 35 the company's data system formulates a suitable return message f.ex. "Job 654 acknowledged as completed. Next job no. 655 is at address
5 Sturenkatu 16, contact person MM", and transmit it to the voice server. At point 36 the voice server transmits the return message as a GSM short message or voice message to the mobile station, which sent the data code. The entire process chain takes time only around 10 seconds.

Above for the data code transmission is used a mobile station. For the data code transmission can also
10 be used a combination of a mobile station and portable computer, or a fixed network telephone. If a fixed network telephone is used for the data code transmission suitable dialing numbers belonging to numbering in the public telecommunications network must be reserved for use which are directed to the intelligent network centre.

15 The invention is described above by referring to one of its preferred embodiment. However, this is by no means an attempt to limit the invention to concern just this example, but all variations within the spirit of the inventive idea disclosed in the following claims are possible

CLAIMS

1. System to transmit data to a company's data system (23) by a mobile phone (20) connected to a mobile communications network, and to receive acknowledgment to the same mobile phone from the company's data system, **characterized** in, that dialing of a previously defined target number dialed by a mobile station is directed to an intelligent network centre (21), that the target number is decoded into data, which is transmitted to a company's data system during the connection, and the system transmits an acknowledgment during the connection as a voice message or as a GSM short message in a text format, either to the mobile station, where from the data was sent, or to as a pager message to a desired pager device.
2. System according to the claim 1, **characterized** in, that the intelligent network centre uses identifying of the caller's number to check whether the caller is entitled to use the service, both to check to which information system of which company the data has been sent.
3. System according to the claims 1 and 2, **characterized** in, that the intelligent network centre transmits preferably by using telecommunications network signaling the target number, the caller's number and the address of the company's data system to the voice server (22), which is a computer capable also for identifying of telephone numbers and formulating of voice messages. The voice server converts the target number into data and transmits the data and the caller's number to the company's data system using a data network, preferably a data network based on TCP/IP protocol.
4. System according to the claims 1 - 3, **characterized** in, that the company's data system stores the data into the data system both formulates a return message, which includes an acknowledgment of the data received and further a possible additional information, and transmits it to the voice server using the data network. The voice server transmits using the mobile communications network the return message either as a GSM short message (text message) or as a voice message to the mobile station, which transmitted the data code, or as a pager message to the desired pager device.
5. Method to transmit data to a company's data system (23) by a mobile phone (20) connected to a mobile communications network, and to receive acknowledgment to the same mobile phone from the company's data system, **characterized** in, that dialed by a mobile station is dialed a previously defined target number, which is directed to an intelligent network centre (21), that the target number is decoded into data, which is transmitted to a company's data system during the connection, and an acknowledgment is transmitted during the connection as a voice message or as a GSM short message

6

in a text format, selectively either to the mobile station, which sent the data, or to as a pager message to a desired pager device.

6. Method according to the claim 5, **characterized** in, that a caller's number identifying is used to
5 check whether the caller is entitled to use the service, and to check to which information system of which company the data has been sent.

7. Method according to the claims 5 and 6, **characterized** in, that the intelligent network centre
transmits using preferably a telecommunications network signaling the target number, the caller's
10 number and the address of the company's data system to the voice server, which is a computer capable also to identify telephone numbers and formulate voice messages. The voice server converts the target number into data and transmits the data both the caller's number into the company's data system using a data network, preferably a data network based on TCP/IP protocol.

15 8. Method according to the claims 5 - 7, **characterized** in, that the company's data system stores the data into the data system both formulates a return message, which includes an acknowledgment of the data received and further a possible additional information, and transmits it to the voice server using the data network. The voice server transmits using the mobile communications network the return message either as a GSM short message (text message) or as a voice message to the mobile station,
20 which transmitted the data code, or as a pager message to the desired pager device.

1 / 3

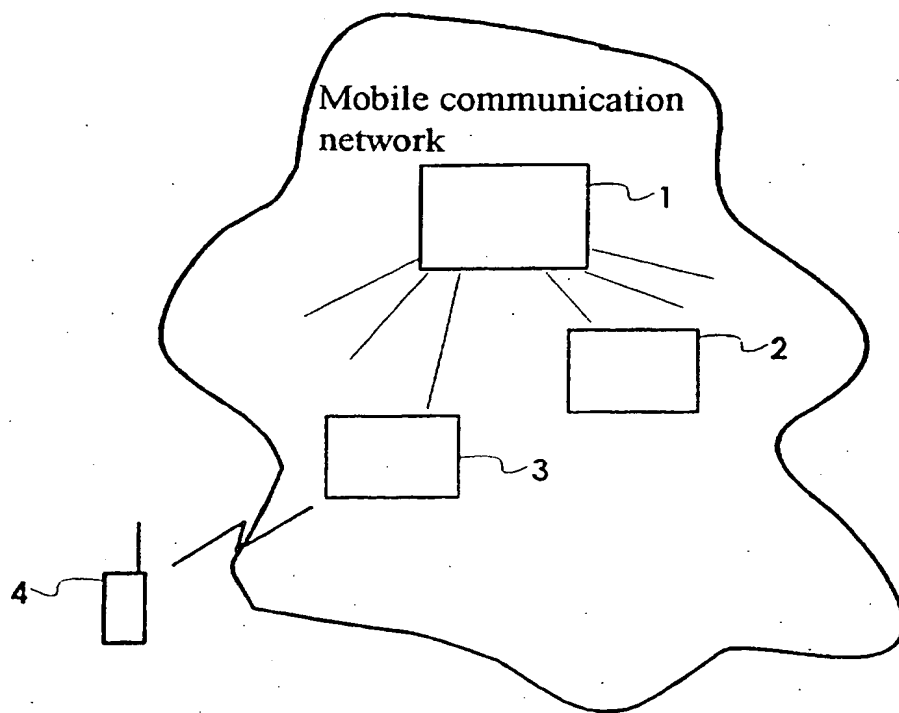


Fig. 1

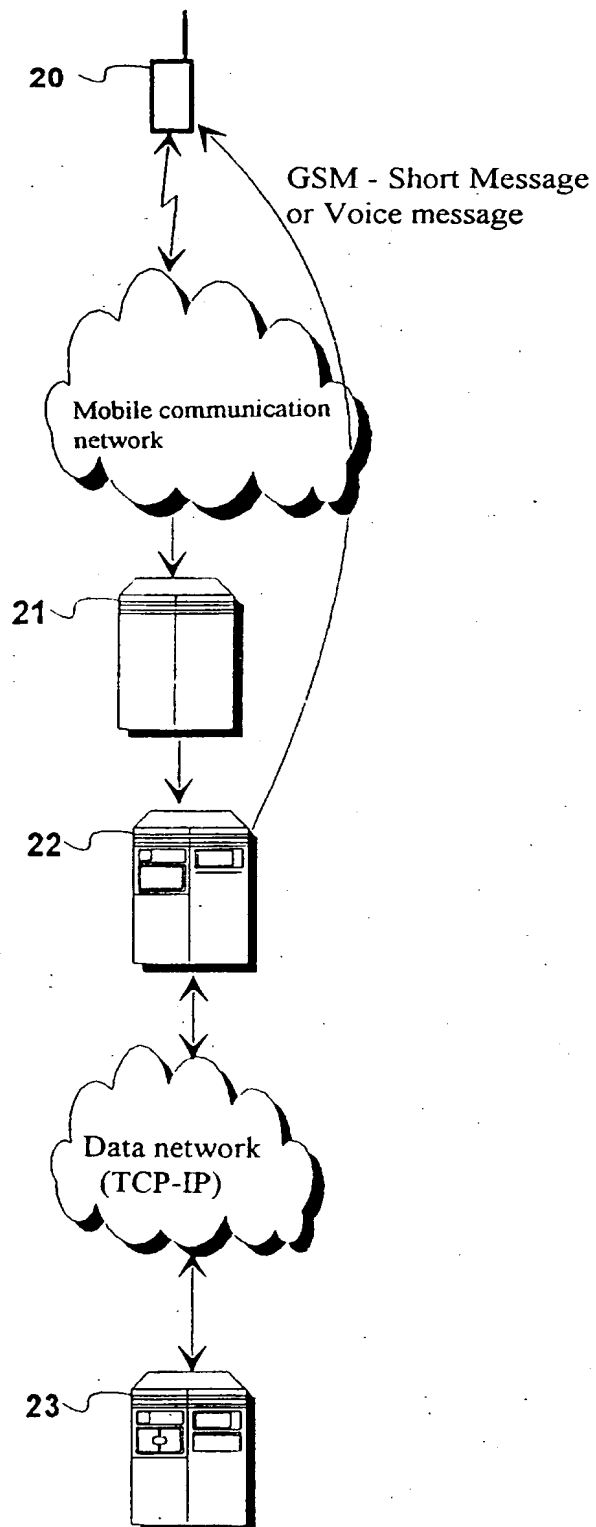


Fig. 2

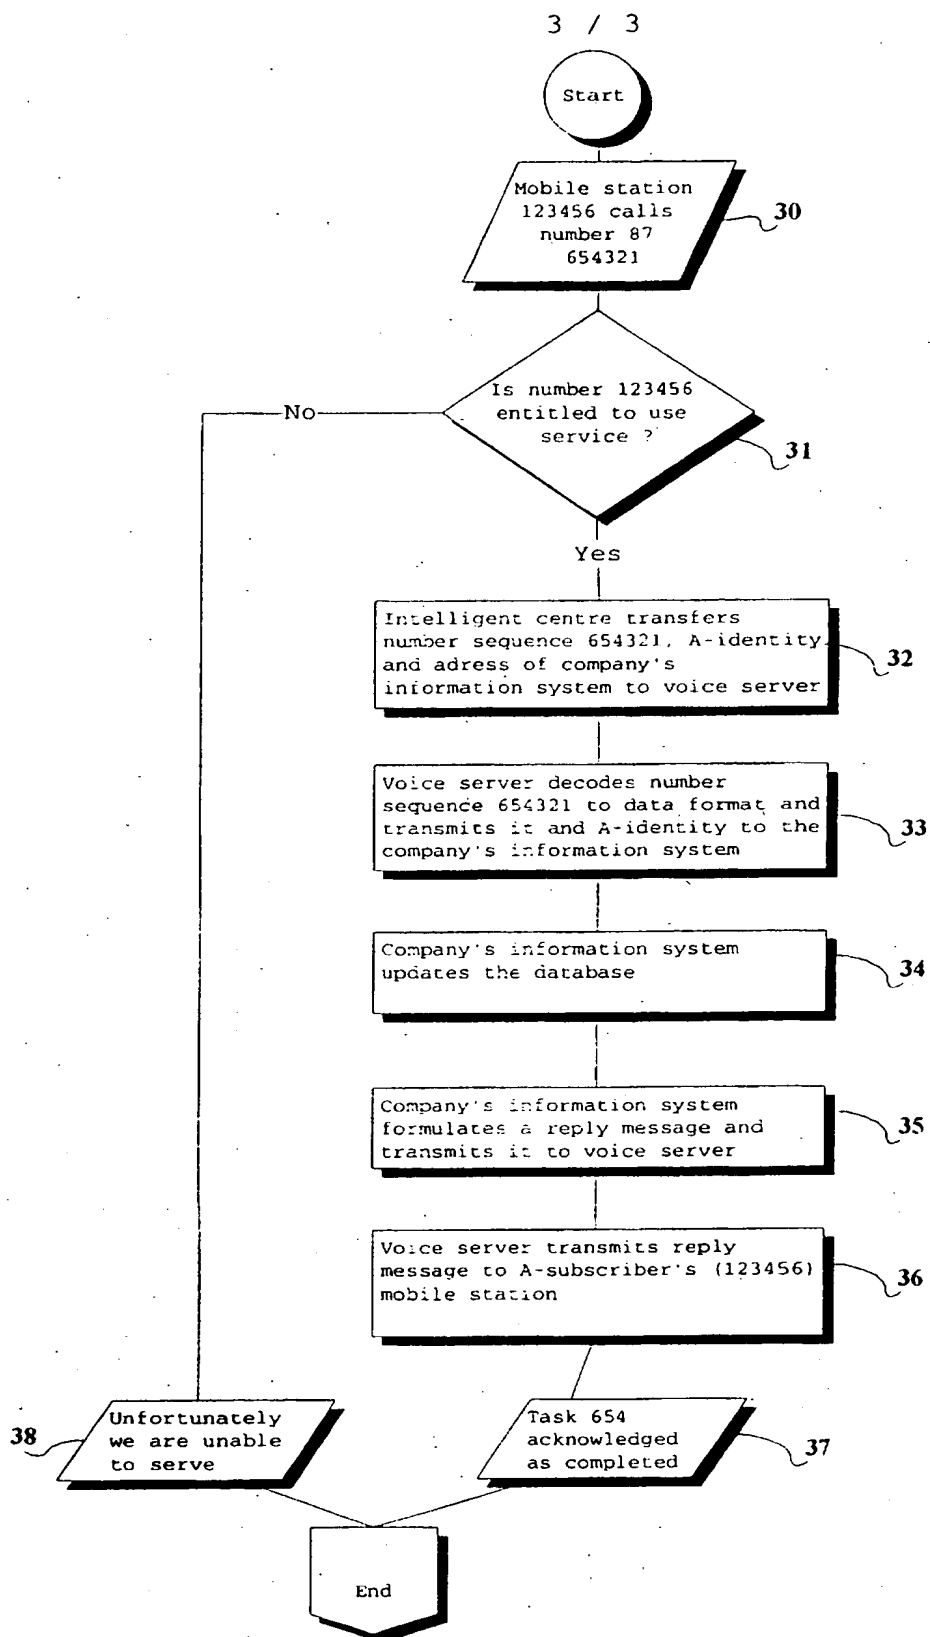


Fig. 3

THIS PAGE BLANK (USPTO)



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04Q 7/22, 7/38, H04M 3/44	A3	(11) International Publication Number: WO 97/31498 (43) International Publication Date: 28 August 1997 (28.08.97)
(21) International Application Number: PCT/FI97/00113 (22) International Filing Date: 20 February 1997 (20.02.97) (30) Priority Data: 960760 20 February 1996 (20.02.96) FI (71) Applicant (for all designated States except US): TELECOM FINLAND OY [FI/FI]; P.O. Box 106, FIN-00051 Tele (FI). (72) Inventor; and (75) Inventor/Applicant (for US only): RANTANEN, Kari [FI/FI]; Framnäsintie 6 A 11, FIN-02430 Masala (FI). (74) Agent: LAHTI, Heikki; Telecom Finland Oy, P.O. Box 106, FIN-00051 Tele (FI).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i> <i>In English translation (filed in Finnish).</i> (88) Date of publication of the international search report: 20 November 1997 (20.11.97)
(54) Title: SYSTEM AND METHOD FOR TRANSMITTING DATA (57) Abstract <p>The invention relates to a system and a method to transmit data to a company's data system (23) by a mobile phone (20) connected to a mobile communications network, and receive an acknowledgement to the same mobile phone from the company's data system. Characteristic to the invention is that a preset target number dialed by a mobile phone is directed to an intelligent network centre (21), that the target number is decoded into data, which is transmitted to a company's data system during the connection. The intelligent network centre uses the caller's number identifying to check whether the caller is entitled to use the service, and to check to which information system of which company the data has been sent. The intelligent network centre transmits preferably by using transmits a telecommunications network signalling the target number, caller's number and address of the company's to a voice server (22), which is a computer capable also to identify telephone numbers and formulate voice messages. The voice server converts the target number into data and transmits the data and the caller's number to the company's data system using a data network, preferably a data network based on TCP/IP protocol. The company's data system stores the data in the data system and formulates a return message, which includes an acknowledgement of the received data and further a possible additional information, and transmits it to the voice server using the data network. The voice server transmits using the mobile communications network the return message either as a GSM short message (text message) or as a voice message to the mobile station, which transmitted the data code, or as a pager message to the desired pager device.</p> <div data-bbox="1201 1113 1526 1953"> </div>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic			SE	Sweden
CG	Congo	KR	Republic of Korea	SG	Singapore
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LR	Liberia	SZ	Swaziland
CS	Czechoslovakia	LT	Lithuania	TD	Chad
CZ	Czech Republic	LU	Luxembourg	TG	Togo
DE	Germany	LV	Latvia	TJ	Tajikistan
DK	Denmark	MC	Monaco	TT	Trinidad and Tobago
EE	Estonia	MD	Republic of Moldova	UA	Ukraine
ES	Spain	MG	Madagascar	UG	Uganda
FI	Finland	ML	Mali	US	United States of America
FR	France	MN	Mongolia	UZ	Uzbekistan
GA	Gabon	MR	Mauritania	VN	Viet Nam

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 97/00113

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04Q 7/22, H04Q 7/38, H04M 3/44

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04M, H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 9426073 A1 (TELEFONAKTIEBOLAGET LM ERICSSON), 10 November 1994 (10.11.94), page 4, line 17 - line 25; page 5, line 6 - line 12; page 6, line 8 - line 21, page 6, line 30 - page 7, line 24: page 10, line 18 - line 33 --	1-8
Y	WO 9520281 A1 (RESEARCH IN MOTION LIMITED), 27 July 1995 (27.07.95), page 2, line 23 - line 25; page 5, line 21 - page 6, line 3; page 8, line 15 - page 9, line 20, page 14, line 6 - page 15, line 18; page 16, line 6 - line 30; page 17, line 28 - page 18, line 1 --	1-8

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "B" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

23 Sept. 1997

26 -09- 1997

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Göran Petersson
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 97/00113

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 9506381 A1 (TELECOM FINLAND OY), 2 March 1995 (02.03.95), page 2, line 17 - page 3, line 4; page 4, line 7 - line 20 --	1-8
A	WO 9520300 A1 (NOKIA TELECOMMUNICATIONS OY), 27 July 1995 (27.07.95), page 1, line 20 - line 23; page 7, line 26 - page 8, line 3; page 8, line 26 - page 10, line 8 --	1-8
A	WO 9326131 A1 (NOKIA TELECOMMUNICATIONS OY), 23 December 1993 (23.12.93), page 4, line 4 - line 9; page 4, line 27 - page 5, line 4; page 8, line 4 - page 9, line 24 --	1-8
A	WO 9413070 A1 (MOTOROLA, INC.), 9 June 1994 (09.06.94), page 6, line 5 - page 7, line 32 --	1-8
A	WO 9512292 A1 (TELEFONAKTIEBOLAGET LM ERICSSON), 4 May 1995 (04.05.95), page 10, line 28 - page 11, line 3, abstract ----- --	1-8

INTERNATIONAL SEARCH REPORT
Information on patent family members

01/09/97

International application No.

PCT/FI 97/00113

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
WO	9426073	A1	10/11/94	AU	6694694 A	21/11/94
				CA	2137136 A	30/10/94
				CN	1108463 A	13/09/95
				EP	0653140 A	17/05/95
				FI	946141 A	28/12/94
				JP	7508634 T	21/09/95
				NO	944961 A	21/12/94

WO	9520281	A1	27/07/95	AU	1423995 A	08/08/95
				US	5559800 A	24/09/96

WO	9506381	A1	02/03/95	AU	675970 B	27/02/97
				AU	4960693 A	15/03/94
				AU	7462594 A	21/03/95
				CA	2143319 A	03/03/94
				CN	1131492 A	18/09/96
				EP	0671110 A	13/09/95
				EP	0715792 A	12/06/96
				FI	97265 B	31/07/96
				FI	98185 B	15/01/97
				FI	933744 A	27/02/94
				FI	942842 A	16/12/95
				HU	71653 A	29/01/96
				HU	73132 A	28/06/96
				HU	9500558 D	00/00/00
				HU	9600164 D	00/00/00
				JP	8502391 T	12/03/96
				JP	9500506 T	14/01/97
				LT	4116 B	25/10/96
				LT	96014 A	25/10/96
				LV	11409 B	20/10/96
				NO	950715 A	31/03/95
				NO	960727 A	23/02/96
				PL	307680 A	12/06/95
				US	5594777 A	14/01/97
				WO	9405126 A	03/03/94

WO	9520300	A1	27/07/95	AU	1418995 A	08/08/95
				CN	1122178 A	08/05/96
				DE	9419554 U	02/02/95
				DK	9400473 U	27/01/95
				EP	0691067 A	10/01/96
				FI	1517 U	20/09/94
				FI	98333 B,C	14/02/97
				FI	940312 A,V	22/07/95
				FR	2720374 A,B	01/12/95
				GB	2289880 A	06/12/95
				GB	9424653 D	00/00/00
				JP	8508387 T	03/09/96

Form PCT/ISA/210 (patent family annex) (July 1992)

INTERNATIONAL SEARCH REPORT

Information on patent family members

01/09/97

International application No.

PCT/FI 97/00113

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9326131 A1	23/12/93	AU 672788 B	17/10/96
		AU 4072593 A	04/01/94
		EP 0667087 A	16/08/95
		FI 96731 B,C	30/04/96
		JP 7507665 T	24/08/95
		US 5577102 A	19/11/96
WO 9413070 A1	09/06/94	AU 673221 B	31/10/96
		AU 5617794 A	22/06/94
		BG 99745 A	29/12/95
		CN 1095881 A	30/11/94
		CZ 9501336 A	15/01/97
		EP 0671084 A	13/09/95
		FI 952577 A	26/05/95
		HU 73106 A	28/06/96
		HU 9501551 D	00/00/00
		JP 8504068 T	30/04/96
		NO 952099 A	29/05/95
		NZ 258484 A	26/10/95
		PL 309247 A	02/10/95
		US 5392452 A	21/02/95
WO 9512292 A1	04/05/95	AU 678310 B	22/05/97
		AU 8069594 A	22/05/95
		CN 1116893 A	14/02/96
		EP 0677232 A	18/10/95
		FI 953142 A	22/06/95